

# MAC FAUCETS

The Leader in Decorative Automatic Faucets World Wide

*Autoluxe Faucets are Available in Twenty Finishes*



## Autoluxe™ Model: FA43-124 Featuring:

- **Brass Faucet.**
- **Solid Brass Valving System.**
- **Water Safe Control Electronics.**
- **Battery Powered, (4 Standard AA Batteries).**
- **Water Flow Adjustment Capability.**
- **Available in Twenty (20) Finishes.**
- **Vandal resistant aerator (as of 4/2012)**

### Package Includes

*Faucet*

*FA43 Automator*

*Single Water Source  
Fitting*

*Water Flow Valve  
With Built-in Particle  
Filter*

*Stainless Steel Hose*

*Mounting Hardware*

*Batteries Pre-installed*

*All the hardware necessary for  
satisfactory installation*

*Drain Sold Separately*

ANSI A112.18.1M

CSA Standard B125, 2.2  
U.S. GPM

Complies with NSF  
Standard 61, Section 9



The model FA43-124 is member of an expanding line of **wall mounted hands free faucets** available from MAC. This faucet is ideal for bathroom applications where *modern* wall mounted automatic faucets are desired. *Don't let the good looks fool you, the model FA43-124 is a heavy duty faucet that is designed for heavy traffic applications.* It features the Faucet Automator model FA43. Manufactured to last, the FA43 employs the latest in plug and play digital electronics, and is equipped with a solid brass solenoid valve with integral filter and water flow adjustment. The faucet is shipped complete and is packaged for ease of installation.

**MAC Faucets is first to design and manufacture decorative automatic wall mount faucets world wide.**


## SPECIFICATIONS AND DIMENSIONS

MODEL:	<b>FA43-124</b>
SPOUT:	SOLID BRASS
POWER:	4 (AA) BATTERIES / AC ADAPTER OPTIONAL
BATTERY LIFE EXPECTANCY:	120,000 CYCLES
SOLENOID VALVE:	6 VOLT MAGNET LATCHING.
WORKING WATER PRESSURE:	1 PSI -100 PSI
SUPPLY INLET SIZE:	1/2" NPT MALE
WATER TEMPERATURE CONTROL:	OPTIONAL
POP-UP DRAIN KNOB:	<b>NONE</b>
SENSOR TYPE AND LOCATION:	ACTIVE INFRARED, WALL MOUNT
SENSOR MICROPROCESSOR:	DIGITAL, PUG AND PLAY
SENSING RANGE:	2" TO 10" ADJUSTABLE
RESPONSE TIME:	0.3 SECOND
SHUT-OFF DELAY TIME:	2 SECONDS
MAXIMUM RUNNING TIME:	60 SECONDS
PARTICLE FILTER SIZE:	50 MESH
AERATOR:	1.5 GPM STANDARD, OPTIONS AVAILABLE

### Optional Equipment:

- Lavatory Drain, Grid and Pop-Up Type.      • Wall Plates for 4" and 8" hole configuration.
- Adjustable Under The Sink Mixing.      • AC Adapters.

**All Dimensions are approximate and in Inches.**

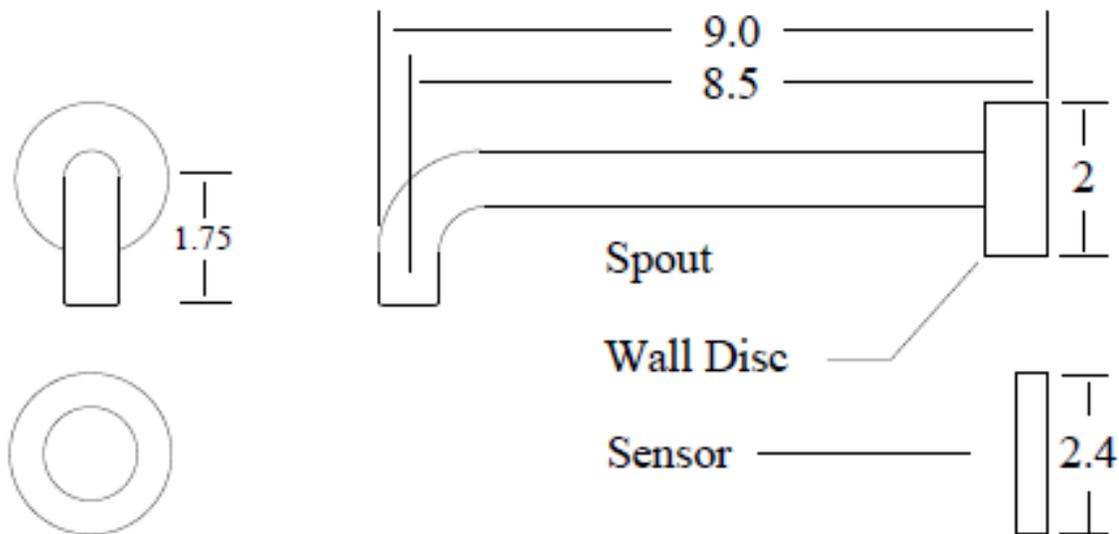

**MAC FAUCETS, LLC**

www.macfaucets.com   Tel 866 558 3200   Fax 310 919 3073   Email Info@macfaucets.com