

MAC FAUCETS

The Widest Selection of Decorative Automatic Faucets

Industry Standard™ Automatic Toilet Flush Valve



Model: ATV-2 Complete Valve

Model: ATV-2B Flush Valve Only
(Retrofit Applications
for Sloan, Zurn, Toto)

Package Includes

Automatic Flush Valve

1" Stop Valve

Supply Flange

*1-1/2"-9" Vacuum
Breaker Assembly*

Toilet Spud Coupling

Batteries Pre-installed

*All the hardware necessary for
satisfactory installation*

ASSI 1037

ANSI/ASME
A112.19.6

Installation
Conforms to ADA
Requirement

Featuring:


- Solid Brass Body.
- **Solid Brass Piston Valving System.**
- Battery Powered (4 Standard AA Batteries).
- **Particle Strainer Built-In for Longer Life Expectancy.**
- Hermetically Sealed Sensor and electronics.
- Visible Low Battery Indicator Built into Sensor Capsule.
- **Available in 20 Finishes.**



SPECIFICATIONS AND DIMENSIONS

MODEL:	ATV-2
BODY:	SOLID BRASS
STOP:	SOLID BRASS
SPUD:	1-1/2", 9" LONG WITH VACUUM BREAKER
POWER:	4 AA ALKALINE BATTERIES
SOLENOID VALVE:	6 VOLT MAGNET LATCHING
WORKING WATER PRESSURE:	1 PSI -100 PSI
WATER INLET SIZE:	1" AT STOP
WATER OUTLET SIZE:	1-1/2" AT SPUD
WATER FLOW CONTROL:	YES, AT STOP
FLUSH CYCLE:	1.2 GPF/4.5 LPF FIELD ADJUSTABLE.
VALVING SYSTEM:	PISTON TYPE
STRAINER:	50 MESH
SENSOR TYPE AND LOCATION:	ACTIVE INFRARED, BODY MOUNT
SENSOR MICROPROCESSOR:	DIGITAL, PUG AND PLAY
SENSING ZONE:	8" TO 32"

All Dimensions in Inches

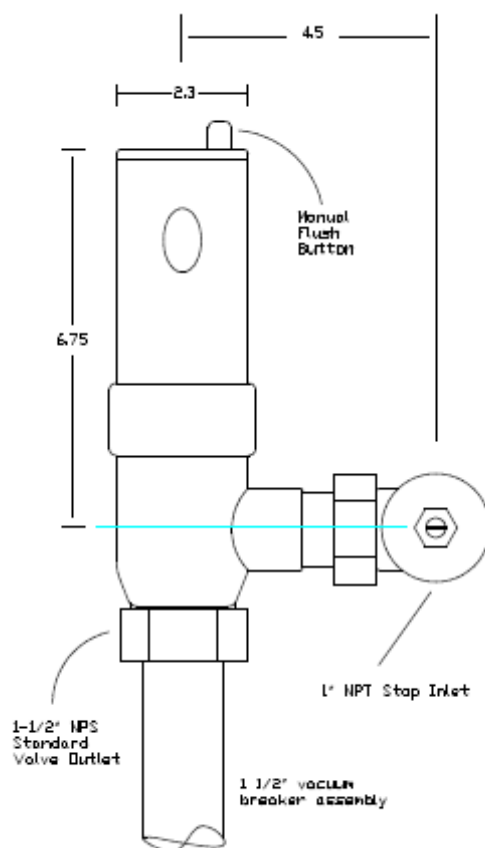

MAC FAUCETS

The Widest Selection of Decorative Automatic Faucets

Industry Standard™ Automatic Urinal Flush Valve



Models: AUV-2 Complete Valve

Model: AUV-2B Flush Valve Only
(Retrofit Applications
for Sloan, Zurn, Toto)

Package Includes

Automatic Flush Valve

3/4" Stop Valve

*Supply Flange with
Sweat Solder*

*3/4"-9" Vacuum
Breaker Assembly*

Urinal Spud Coupling

Batteries Pre-installed

*All the hardware necessary for
satisfactory installation*

ASSI 1037

ANSI/ASME
A112.19.6

Installation
Conforms to ADA
Requirement

Featuring:

- **Solid Brass Body.**
- **Solid Brass Piston Valving System.**
- **Battery Powered (4 Standard AA Batteries).**
- **Particle Strainer Built-In for Longer Life Expectancy.**
- Hermetically Sealed Sensor and electronics.
- Visible Low Battery Indicator Built into Sensor Capsule.
- **Available in 20 Finishes.**



SPECIFICATIONS AND DIMENSIONS

MODEL:	AUV-2
BODY:	SOLID BRASS
STOP:	SOLID BRASS
SPUD:	3/4" - 9" LONG WITH VACUUM BREAKER
POWER:	4 AA ALKALINE BATTERIES
SOLENOID VALVE:	6 VOLT MAGNET LATCHING
WORKING WATER PRESSURE:	1 PSI - 100 PSI
WATER INLET SIZE:	3/4" AT STOP
WATER OUTLET SIZE:	1-1/2" AT SPUD
WATER FLOW CONTROL:	YES, AT STOP
FLUSH CYCLE:	0.5 GPF/1.9 LPF FIELD ADJUSTABLE
VALVING SYSTEM:	PISTON TYPE
STRAINER:	50 MESH
SENSOR TYPE AND LOCATION:	ACTIVE INFRARED, BODY MOUNT
SENSOR MICROPROCESSOR:	DIGITAL, PUG AND PLAY
SENSING ZONE:	8" TO 32"

All Dimensions in Inches

