

MAC FAUCETS

The Widest Selection of Decorative Automatic Faucets

Autoluxe Faucets are Available in Twenty Finishes



Autoluxe™ Model: FA43-129

Featuring:

- **Brass Faucet.**
- **Solid Brass Valving System.**
- **Water Safe Control Electronics.**
- **Battery Powered, (4 Standard AA Batteries).**
- **Water Flow Adjustment Capability.**
- **Available in Twenty (20) Finishes.**

Package Includes

Faucet

FA43 Automator

*Single Water Source
Fitting*

*Water Flow Valve
With Built-in Particle
Filter*

Stainless Steel Hose

Mounting Hardware

Batteries Pre-installed

*All the hardware necessary for
satisfactory installation*

Drain Sold Separately

ANSI A112.18.1M

CSA Standard B125, 2.2
U.S. GPM

Complies with NSF
Standard 61, Section 9



The model FA43-129 is member of an expanding line of **wall mounted hands free faucets** available from MAC. This faucet is ideal for bathroom applications where *traditional design* wall mounted automatic faucets are desired. *Don't let the good looks fool you, the model FA43-129 is a heavy duty faucet that is designed for heavy traffic applications.* It features the Faucet Automator model FA43. Manufactured to last, the FA43 employs the latest in plug and play digital electronics, and is equipped with a solid brass solenoid valve with integral filter and water flow adjustment. The faucet is shipped complete and is packaged for ease of installation.

MAC Faucets is first to design and manufacture decorative automatic wall mount faucets world wide.


SPECIFICATIONS AND DIMENSIONS

MODEL:	FA43-129
SPOUT:	SOLID BRASS
POWER:	4 (AA) BATTERIES / AC ADAPTER OPTIONAL
BATTERY LIFE EXPECTANCY:	300,000 CYCLES
SOLENOID VALVE:	6 VOLT MAGNET LATCHING.
WORKING WATER PRESSURE:	1 PSI -100 PSI
SUPPLY INLET SIZE:	1/2" NPT MALE
WATER MIXING VALVE:	OPTIONAL
POP-UP DRAIN KNOB:	NONE
SENSOR TYPE AND LOCATION:	ACTIVE INFRARED, WALL MOUNT
SENSOR MICROPROCESSOR:	DIGITAL, PUG AND PLAY
SENSING RANGE:	2" TO 10" ADJUSTABLE
RESPONSE TIME:	0.3 SECOND
SHUT-OFF DELAY TIME:	2 SECONDS
MAXIMUM RUNNING TIME:	60 SECONDS
PARTICLE FILTER SIZE:	50 MESH
AERATOR:	1.5 GPM STANDARD, OPTIONS AVAILABLE

Optional Equipment:

- Lavatory Drain, Grid and Pop-Up Type. • Wall Plates for 4" and 8" hole configuration.
- Adjustable Under The Sink Mixing. • AC Adapters.

All Dimensions are approximate and in Inches

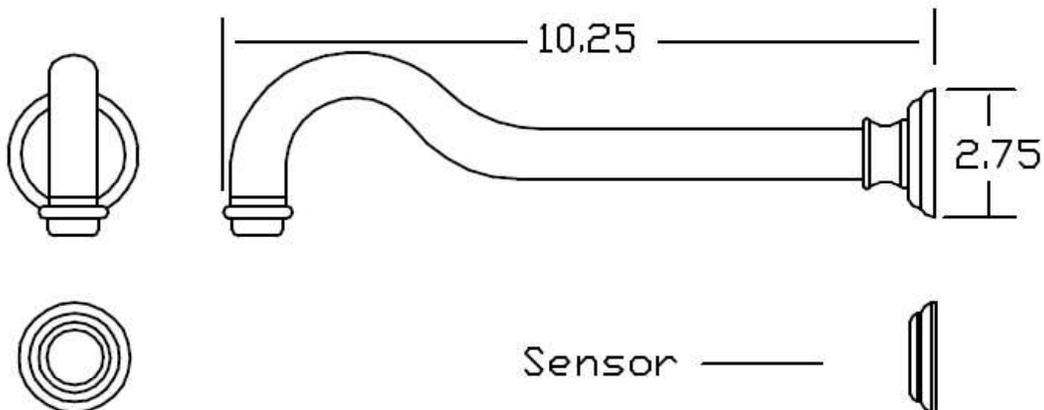

MAC FAUCETS

www.macfaucets.com Tel 866 558 3200 Fax 310 919 3073 Email Info@macfaucets.com

MAC FAUCETS

Electronic, Sensor Liquid Soap Dispenser



Package Includes

Spout

Soap Pump

*All Connections
Between Pump and
Spout*

800ml Soap Bottle

Battery

*Compartment or
Optional AC Power
Supply*

Mounting Hardware

*Remote Control
Optional*

*All hardware necessary
for satisfactory*

Model: PYOS-129 Patent Pending


Features:

- Wall mount installation matches MAC FA43-129 faucet.
- Dispenses Standard Liquid Soap.
- Solid Brass Tube Spout.
- Battery Powered, AC Optional.
- **Available in Twenty+ Matching Finishes.**



SPECIFICATIONS	
MODEL:	PYOS-129
SPOUT:	SOLID BRASS
POWER:	4 (D) BATTERIES / AC ADAPTER OPTIONAL
SOAP PUMP:	6 VOLT PERISTALTIC PUMP SYSTEM
COUNTER ACCOMMODATION:	NA
SENSOR TYPE:	ACTIVE INFRARED, SELF ADJUSTING
SENSING RANGE:	2" TO 6" ADJUSTABLE WITH OPTIONAL REMOTE CONTROL
WORKING SOAP:	STANDARD LIQUID SOAP.
SOAP BOTTLE CAPACITY:	800ML (JUST UNDER A QUART) OPTIONAL 1 GALLON CONTAINERS
SOAP AMOUNT PER USE:	0.5ML TO 1.5ML, ADJUSTABLE WITH OPTIONAL REMOTE CONTROL
REMOTE CONTROL:	HAND HELD. OPTIONAL
FINISH SELECTION:	20+ MATCHING FINISHES

All Dimensions below are approximate, and in inches

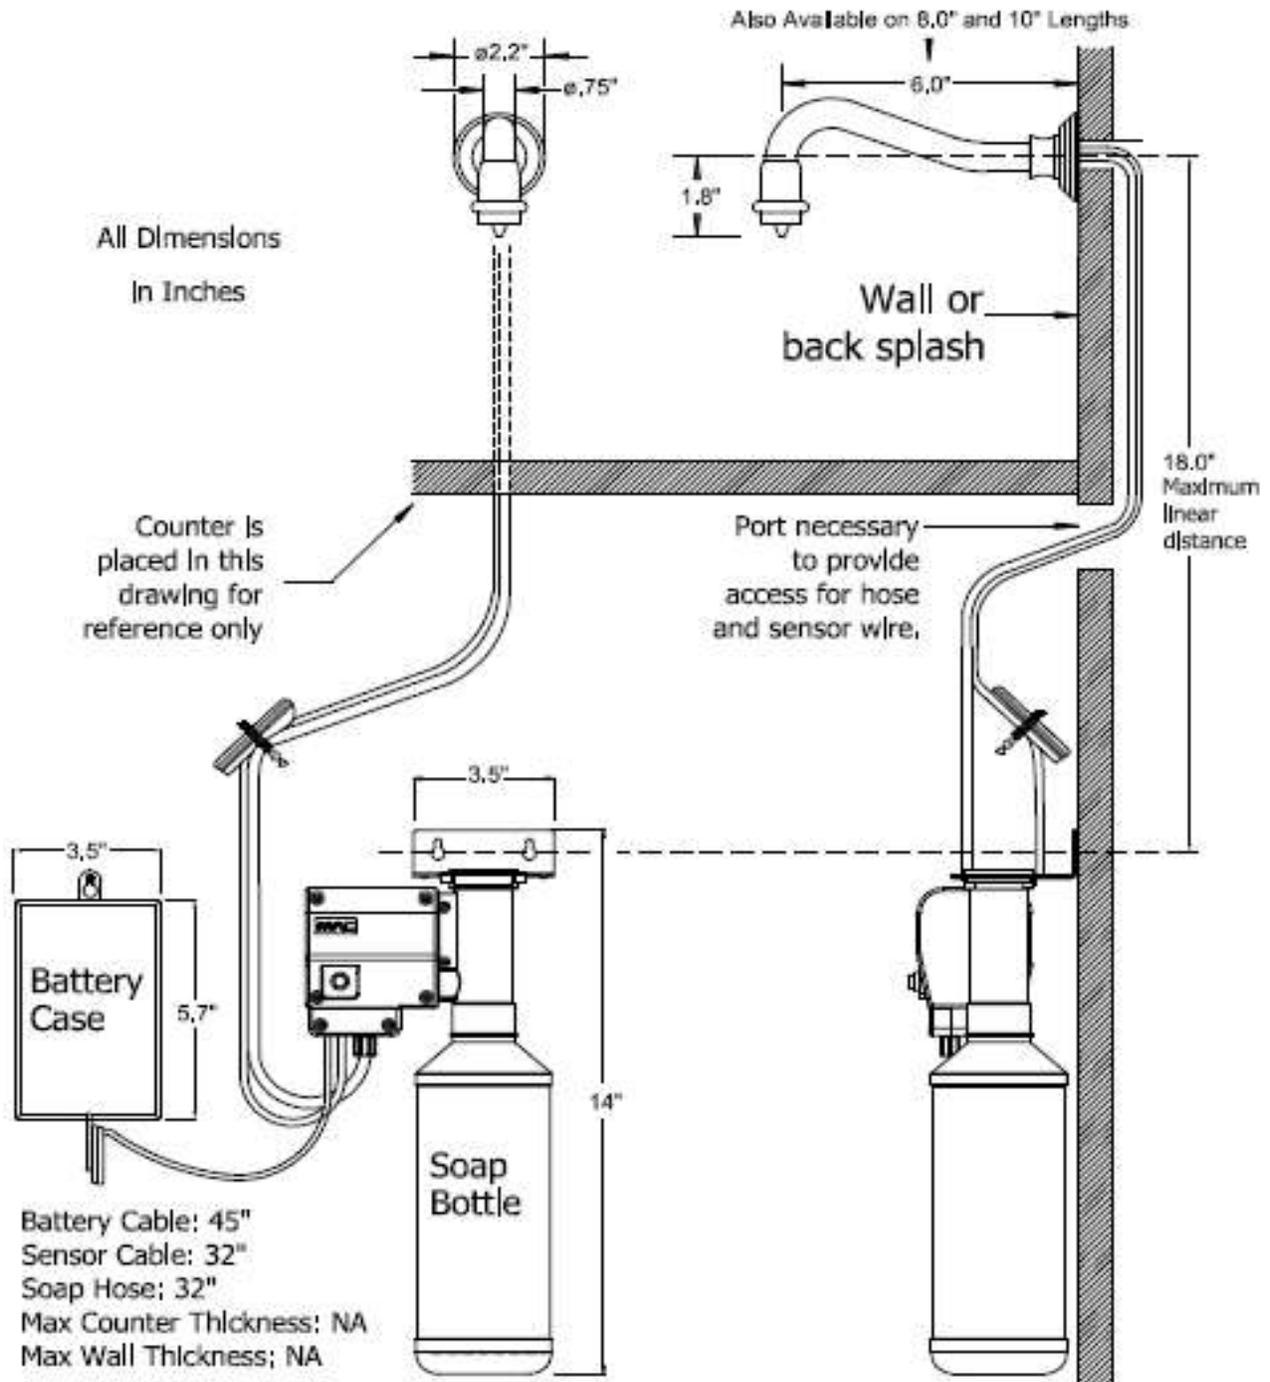

Optional Equipment:

- AC Adapter
- Remote Control (one for many dispensers)
- 1 Gallon capacity container.
- Spout available in custom lengths, 8", 10" as well as other length.

MAC Faucets, LLC

www.macfaucets.com Tel 866 558 3200 Fax 310 919 3073 Email Info@macfaucets.com