

MAC FAUCETS

The Widest Selection of Decorative Automatic Faucets

Industry Standard™ Automatic Toilet Flush Valve



Package Includes

Automatic Flush Valve

1" Stop Valve

Supply Flange

*1-1/2"-9" Vacuum
Breaker Assembly*

Toilet Spud Coupling

Batteries Pre-installed

*All the hardware necessary for
satisfactory installation*

ASSI 1037

ANSI/ASME
A112.19.6

Installation
Conforms to ADA
Requirement

Model: ATV-2 Complete Valve

Model:

ATV-2 1.6 Gallons per flush application

ATV-2-1.28 1.28 Gallons per flush application




Featuring:

- **Solid Brass Body.**
- **Solid Brass Piston Valving System.**
- **Battery Powered** (4 Standard AA Batteries).
- **Three Serial Particle Strainers Built-In for Longer Life Expectancy.**
- Hermetically Sealed Sensor and electronics.
- Visible Low Battery Indicator Built into Sensor Capsule.
- **Available in 22 Finishes.**

SPECIFICATIONS AND DIMENSIONS

MODEL:	ATV-2
BODY:	SOLID BRASS
STOP:	SOLID BRASS
SPUD:	1-1/2", 9" LONG WITH VACUUM BREAKER
POWER:	4 AA ALKALINE BATTERIES
SOLENOID VALVE:	6 VOLT MAGNET LATCHING
WORKING WATER PRESSURE:	1 PSI - 100 PSI
WATER INLET SIZE:	1" PIPE AT STOP
WATER OUTLET SIZE (SPUD):	FOR STANDARD 1-1/2" TOILET SPUD
WATER FLOW CONTROL:	YES, AT STOP
FLUSH CYCLE:	1.28GPF TO 1.6GPF DEPENDING ON MODEL
VALVING SYSTEM:	PISTON TYPE
STRAINER:	50 MESH
SENSOR TYPE AND LOCATION:	ACTIVE INFRARED, BODY MOUNT
SENSOR MICROPROCESSOR:	DIGITAL, PLUG AND PLAY
SENSING ZONE:	8" TO 32" WITH OPTIONAL REMOTE CONTROL

All Dimensions in Inches

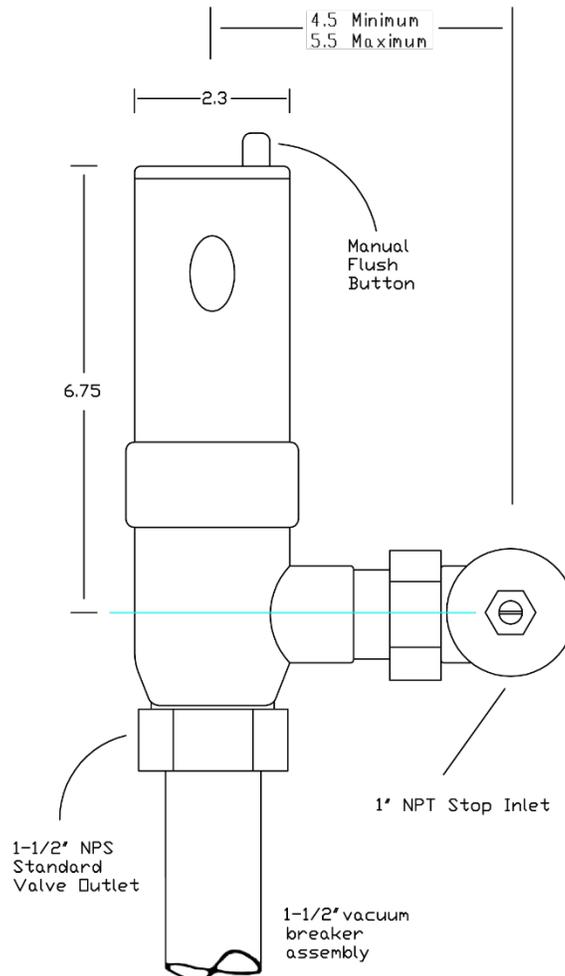

MAC FAUCETS, LLC