

MAC FAUCETS

The Widest Selection of Decorative Automatic Faucets

Industry Standard™ Automatic Urinal Flush Valve



Package Includes

Automatic Flush Valve

3/4" Stop Valve

*Supply Flange with
Sweat Solder*

*3/4"-9" Vacuum
Breaker Assembly*

Urinal Spud Coupling

Batteries Pre-installed

*All the hardware necessary for
satisfactory installation*

ASSI 1037

ANSI/ASME
A112.19.6

Installation
Conforms to ADA
Requirement

Model:

AUV-2 - 1.0 Gallons per flush application

AUV-2-0.5 0.5 Gallons per flush application

AUV-2-0.25 0.25 Gallons per flush application

AUV-2-0.125 0.125 Gallons per flush application




Featuring:

- **Solid Brass Body.**
- **Solid Brass Piston Valving System.**
- **Battery Powered** (4 Standard AA Batteries).
- **Three Serial Particle Strainers Built-In for Longer Life Expectancy.**
- Hermetically Sealed Sensor and electronics.
- Visible Low Battery Indicator Built into Sensor Capsule.
- **Available in 22 Finishes.**

SPECIFICATIONS AND DIMENSIONS

MODEL:	AUV-2
BODY:	SOLID BRASS
STOP:	SOLID BRASS
SPUD:	3/4" - 9" LONG WITH VACUUM BREAKER
POWER:	4 AA ALKALINE BATTERIES
SOLENOID VALVE:	6 VOLT MAGNET LATCHING
WORKING WATER PRESSURE:	1 PSI - 100 PSI
WATER INLET SIZE:	3/4" PIPE AT STOP
WATER OUTLET SIZE (SPUD):	FOR STANDARD 3/4" URINAL SPUD
WATER FLOW CONTROL:	YES, AT STOP
FLUSH CYCLE:	0.125GPF TO 1.0GPF DEPENDING ON MODEL
VALVING SYSTEM:	PISTON TYPE
STRAINER:	50 MESH
SENSOR TYPE AND LOCATION:	ACTIVE INFRARED, BODY MOUNT
SENSOR MICROPROCESSOR:	DIGITAL, PLUG AND PLAY
SENSING ZONE:	8" TO 32" WITH OPTIONAL REMOTE CONTROL

All Dimensions in Inches

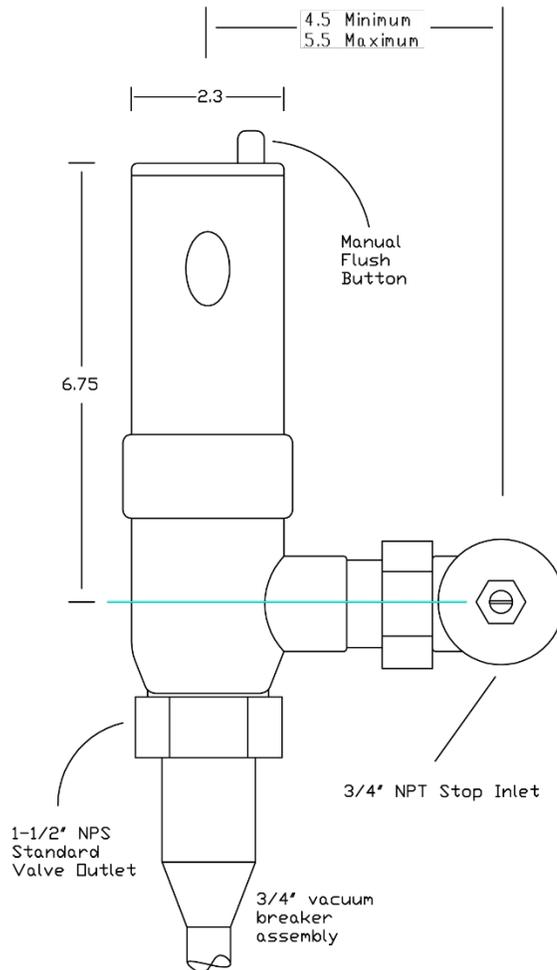

MAC FAUCETS, LLC